DeepBlue V2t Sensor



Travel time, O/D matrices, incident detection, Online web based applications

Bluetooth, Wi-Fi, GPS, 3G, Dual-SIM, Ethernet, Multi-color LED, GPIO, RTC Battery, Non-volatile memory

Field proven, easy set-up and configuration, up to 12 lanes, side-fire, Wireless device detection, tracking

Cost effective, Low power, Self-diagnostics, Autonomous, Reliable and secure transmission

ALL-IN-ONE
TWO EXTERNAL BLUETOOTH &
ANTENNAS V2t-PLATFORM

With our dedication to continuous development the specifications are subject to change. To verify the current information please visit www.deepbluesensor.com

DeepBlue V2t Sensor

POWER SUPPLY

12 to 48 VDC Min 1.49 W (configuration dependent) PoE (Power over Ethernet)

CPU & MEMORY

ARM 9 Processor 128 MB RAM / Flash Micro SD storage

COMMUNICATIONS

Ethernet
Optional 3G/CDMA Worldwide
Dual SIM-Card slot
Remote Sensor Access
Optional General Purpose IO

OPERATIONS

Linux based OS LED for operations diagnostics

ENVIRONMENTAL

-40°C to +80°C IP65 housing

Shock/vibration: NEMA TS2-2003

DIMENSIONS & WEIGHT

H x W x L 337 mm x 413 mm x 150 mm 2.65 kg including stainless steel brackets


BLUETOOTH

Dual channel operation
Two side-mounted antennas
110° horizontal angle; 30° vertical angle
Detects all standard Bluetooth® versions
More than 500 meters range
-104dB receive sensitivity

WI-FI

Optional Wi-Fi detection



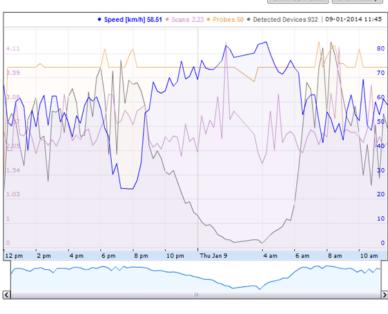

REGULATORY

RoHS Compliant CE, FCC certified



With our dedication to continuous development the specifications are subject to change. To verify the current information please visit www.deepbluesensor.com